PRODUCT SPECIFICATION SHEET



TYPE I ANION
POLYSTYRENIC GEL
CHLORIDE FORM

ResinTech SBG1-F is a fine mesh type 1 strong base anion gel resin in chloride form. It has similar chemical and physical properties as other resins in the SBG1 family. Its fine mesh size yields faster kinetics and improved regeneration efficiency compared to larger bead resins. SBG1-F is intended for industrial applications where resin bed depth is less than ideal and for applications that challenge the kinetic limits of larger size resins.

APPLICATIONS

• Chemical Purification

| TYPICAL PROPERTIES & PHYSICAL CHARACTERISTICS | |
|---|---------------------------------|
| Polymer Matrix | Styrenic Gel |
| Ionic Form | Chloride |
| Fuctional Group | Trimethylamine |
| Physical Form | Spherical Bads ON |
| Particle Size | 300 50 US Mash (297 - 595 µm) |
| % < 50 mesh (300μm) | TE MIC |
| Fuctional Group Physical Form Particle Size % < 50 mesh (300µm) Minimum Sphericity Uniformity Coefficient Reversible Swelling Temp Limit | 93% |
| Uniformity Coefficient | 1.3 |
| Reversible Swelling | CI to OH 18% to 25% |
| Temp Limit | 170°F (77°C) |
| Capacity (meq/mL) | 1.4 |
| Moisture Retention | 42% to 51% |
| Shipping Weight | 43 - 45 lbs/ft³ (689 - 721 g/L) |
| Color | White to Yellow |
| Regenerability | Yes |

PACKAGING OPTIONS

- 1 ft³ bags
- 1 ft³ boxes
- 1 ft³ drums
- 7 ft³ drums
- 42 ft³ supersacks







Revision 1.0 © 2020 ResinTech, Inc.



FINE MESH TYPE I ANION POLYSTYRENIC GEL CHLORIDE FORM

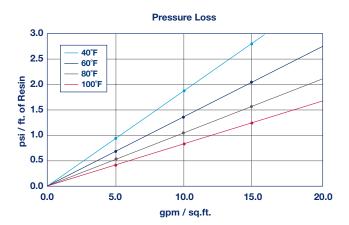

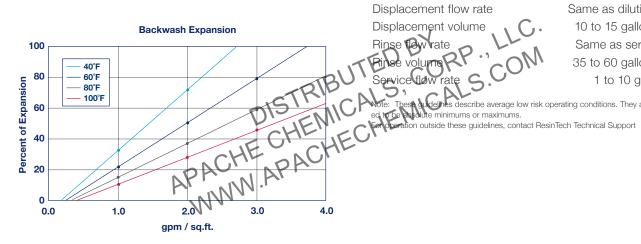

SUGGESTED OPERATING CONDITIONS

Maximum continuous temperature 170°F Chloride form Minimum bed depth 24 inches Backwash expansion 25 to 50 percent Maximum pressure loss 20 psi 0 to 14 SU Operating pH range

Regenerant Concentration

2 to 10 percent NaCl Salt cycle Regenerant level 4 to 10 lbs./cu.ft. Regenerant flow rate 0.25 to 1.0 gpm/cu.ft. Regenerant contact time >40 minutes Displacement flow rate Same as dilution water 10 to 15 gallons/cu.ft. Same as service flow 35 to 60 gallons/cu.ft. 1 to 10 gpm/cu.ft.

describe average low risk operating conditions. They are not intend-



